


# SERIES 2000 SPDT COAXIAL SWITCHES

**Description:** Series 2000 units are SPDT coaxial switches designed to meet MIL-E-5400 Class 1. Failsafe and latching versions are available with a universal mounting configuration and your choice of power connectors.


## SPECIFICATIONS

Switch Type	Single pole/double throw
Operating Modes	Failsafe or latching
RF Contacts	Break before make
Frequency Range	DC to 12.4 GHz
Insertion Loss	0.5 dB max.
VSWR	1.5:1 max.
Isolation	60 dB min.
Impedance	50 ohms
Weight (failsafe)	8 ounces
Connectors, RF	Type N
Operating Voltage	28 VDC standard (other voltages available)
Connector, Power	Feed through terminals or MS connectors
Switching Time	20 ms max.
Operating Life	1,000,000 cycles

Model 2016-4

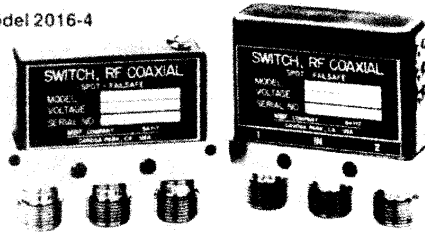

Model 2011-4

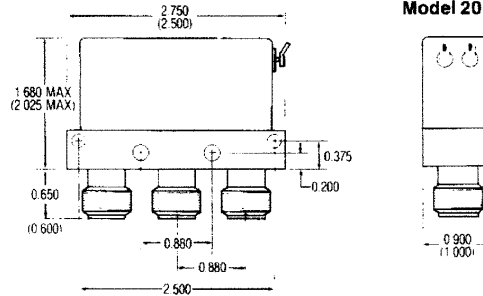

DIMENSIONS: Model 2016-4 (Model 2011-4 in parenthesis)